



Terry Step Lift (TSL) range

Simple and practical solution to accessing a home



TSL 500



TSL 1100

Our **Terry Step Lift (TSL) range** offer an easy solution for wheelchair access to and from a domestic property. The lifts are versatile and flexible, and our experienced engineers can install a TSL in less than a day.

A ramp may not always be a feasible option due to lack of space or not enough length to achieve the required gradient. Terry Step Lifts provide a safe and reliable way to gain independent access into and out of a domestic property.

Three models are available to cater for every need. The TSL 500 and 1000 have a load capacity of 250 kg and they can travel up to 500 and 1000 mm respectively (or 960 mm, when a triple bridging step unit is supplied). The TSL 1100 is designed to carry heavy wheelchairs and bariatric users. It has a load capacity of 385 kg with a maximum travel height of 1000 mm.

Consisting of a self-contained unit, Terry Step Lifts are suitable for mounting on a flat 100 mm concrete base and are quick to install. The TSL 500 and 1000 models can be supplied with bridging steps, which allows easy pedestrian access via the same doorway.

Terry Step Lifts at a glance

- **Quickly installed** by our engineers in less than a day
- **Versatile solution** with a choice of bridging steps (TSL 500 & 1000 only) or upper level gate protection
- Can be **easily re-sited** and often a cheaper option than a ramp
- **Safe, reliable and easy to use**
- **Large load capacity model available** for bariatric users
- **Manufactured in the UK** to BS 6440 standard



TSL 1000

TSL Standard Specification

	TSL 500	TSL 1000	TSL 1100
Application range	Sited internally or externally, for wheelchair users only		
Max safe working load	250 kg	250 kg	385 kg
Max travel	500 mm	1000 mm*	1000 mm
Platform width	800 mm	800 mm	1100 mm
Options	<ul style="list-style-type: none"> Handrails Single step bridging Upper gate interlock kit Upper gate and interlock Remote up/down control Remote control enabler 	<ul style="list-style-type: none"> 900 mm wide version Single, double or triple step bridging Upper gate interlock kit Upper gate and interlock Remote up/down control Pit installation (indoor only) 	<ul style="list-style-type: none"> Steel or plexi-glass side infills Remotely located call stations Stainless steel in lieu of black powder coat paint finish
Closed height	75 mm		
Power supply electrical requirements	220 / 240 V~50 / 60 Hz-13 A single phase		
Low voltage control system	24 V DC		
Operating temperature range	-5°C to +40°C		
Safety	Automatic wheelchair arrestor mechanism and full battery back-up. Constant pressure controls		
Drive	Hydraulic scissor mechanism		

* 960 mm when a triple bridging step unit is supplied



The Terry Lifts Guarantee




- ✓ **Certification:** ISO 9001:2015, ISO 14001:2015 and OHSAS 18001:2007
- ✓ **Safety:** Full safety features
- ✓ **Compliance:** British Standard BS6440:2011, and is CE marked
- ✓ **Origin:** Designed & manufactured in Great Britain with over 45 years' experience

Dimensions


All dimensions in mm

TSL 500

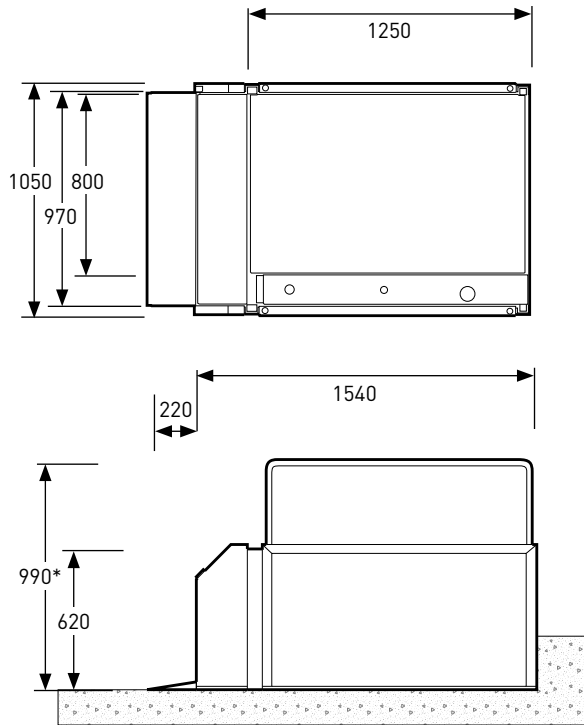


*Handrails shown are an optional extra

TSL 1000

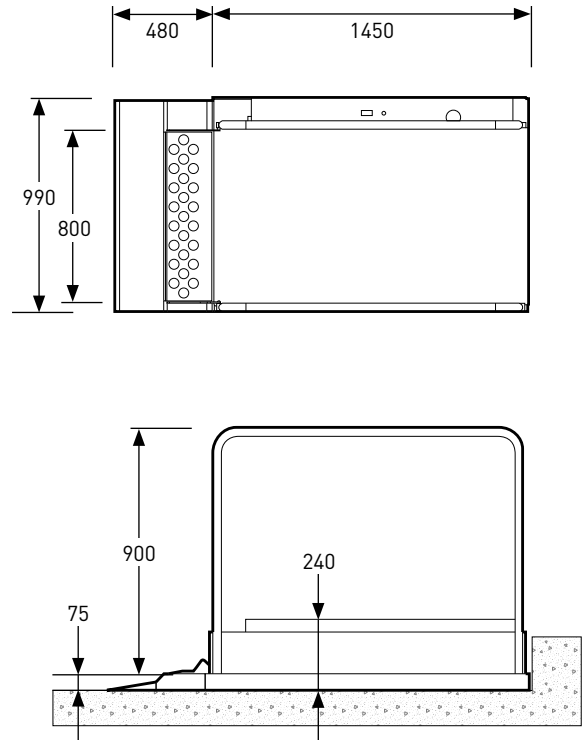

TSL 1100

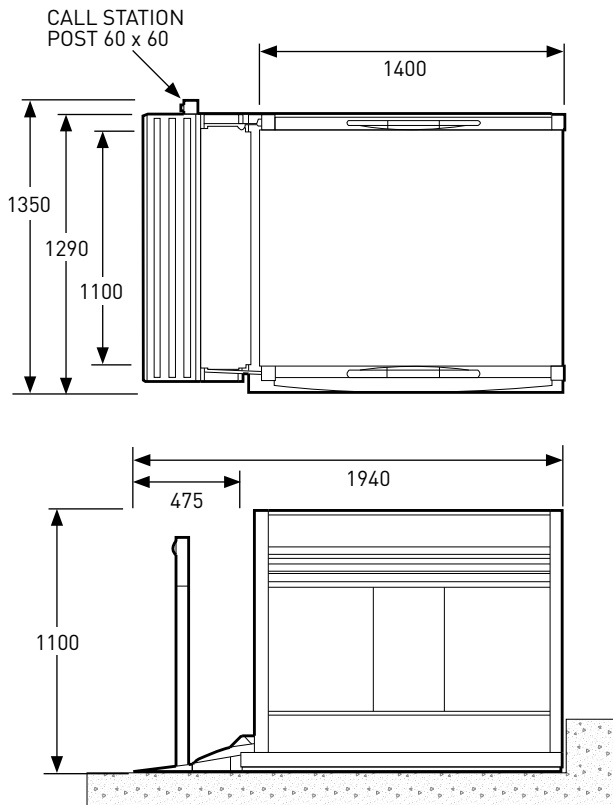

Issue date: 6/2017

Call us today on: **0345 365 5366**
or e-mail: **sales@terrylifts.co.uk**



Terry
total lift solutions

Terry Group Ltd.,
Longridge Trading Estate,
Knutsford, Cheshire, WA16 8PR.
Tel. (outside UK): +44 (0)1565 650 376
www.terrylifts.co.uk

